


HCP139412 TYPE

TYPE

HCP 139412

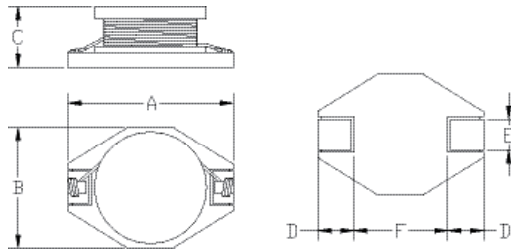

A: 12.95 MAX
 B: 9.4 MAX
 C: 11.43 MAX
 D: 2.54
 E: 2.54
 F: 7.62

SPECIFICATION

ITEM	L	SRF	DCR	IDC1	IDC2
HCP139412	(μ H)	(MHz)	MAX.(Ω)	MAX.(A)	MAX.(A)
100M	10	22.0	0.04	8.0	3.5
150M	15	18.0	0.05	7.0	3.0
220M	22	11.0	0.066	5.5	2.5
330M	33	9.0	0.08	4.0	2.0
470M	47	8.0	0.11	3.8	1.6
680M	68	7.0	0.17	3.0	1.2
101M	100	5.0	0.22	2.5	1.2
151M	150	4.0	0.34	2.0	0.9
221M	220	3.5	0.44	1.6	0.7
331M	330	2.5	0.70	1.2	0.6
471M	470	2.0	0.95	1.0	0.3
681M	680	2.0	1.20	1.0	0.2
102M	1000	1.5	2.00	0.8	0.1

M: \pm 20%

can design any part to your requirements with different inductance.

* All parameters as this content presented are subject to final specifications both sides confirmed.