
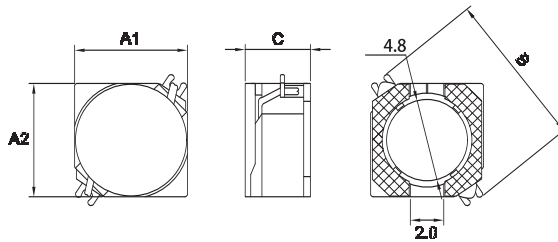


HCRH6D28 TYPE

TYPE

HCRH 6D28



A1: 7.3 MAX.
 A2: 7.3 MAX.
 B: 10.5 MAX.
 C: 3.0 MAX.

SPECIFICATION

ITEM	L	DCR	IDC
HCRH6D28	(μ H)	MAX.(m Ω)	MAX.(A)
3R0N	3.0 \pm 30%	29	2.90
3R9N	3.9 \pm 30%	30	2.50
5R0N	5.0 \pm 30%	35	2.20
6R0N	6.0 \pm 30%	45	2.00
7R3N	7.3 \pm 30%	54	1.75
8R6N	8.6 \pm 30%	58	1.70
100N	10 \pm 30%	65	1.55
120N	12 \pm 30%	70	1.40
150N	15 \pm 30%	90	1.32
180N	18 \pm 30%	107	1.20
220N	22 \pm 30%	140	1.15
270N	27 \pm 30%	160	0.92
330N	33 \pm 30%	173	0.88
390N	39 \pm 30%	230	0.80
470N	47 \pm 30%	280	0.75
560N	56 \pm 30%	350	0.70
680N	68 \pm 30%	370	0.64
820N	82 \pm 30%	430	0.57
101N	100 \pm 30%	550	0.50

N: \pm 30%

can design any part to your requirements with different inductance.

* All parameters as this content presented are subject to final specifications both sides confirmed.